



# How To Assemble the Quick Adjust Sling Strap

1. Lay out the 3 pieces: A) Nylon Strap, B) Slider Buckle, C) Attachment piece - in this case it's an HK Clip.

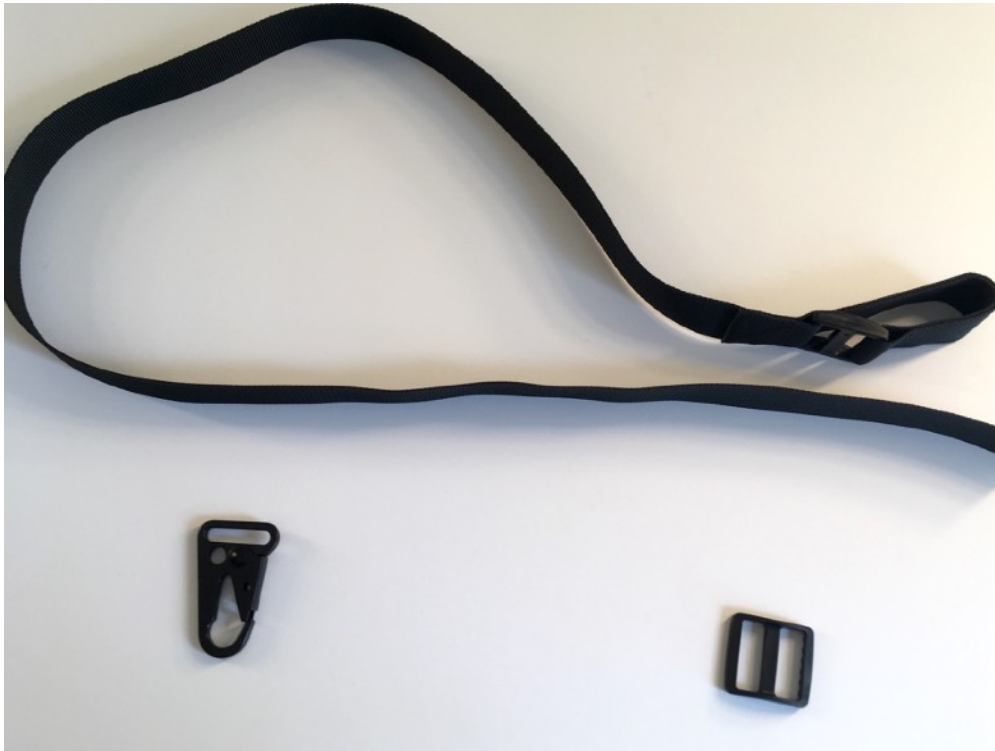

2. Place Attachment piece (HK Clip) onto Nylon Strap, with opening end of clip facing outwards.

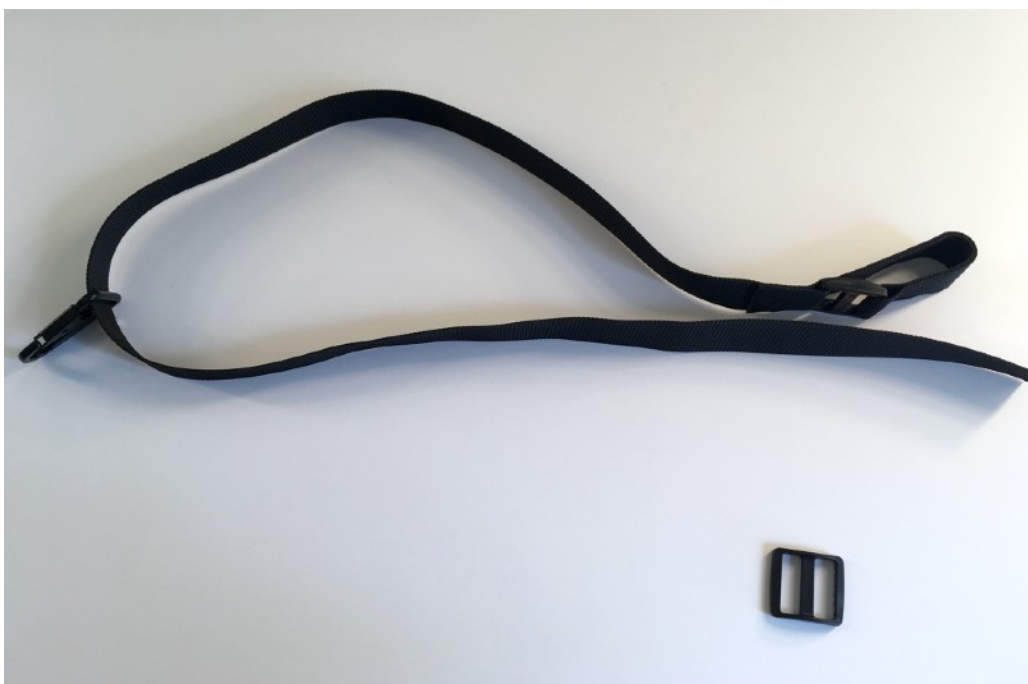

3. Feed Nylon Strap through the plastic buckle that is already sewn into strap loop.



4. Place the loose slider buckle onto strap. This slider buckle should be facing the same direction as the plastic buckle already sewn into strap loop.



5. Place loose end of strap through metal “O” ring from paracord sling.



6. Feed remaining strap end back through the slider buckle.



Assembled Quick Adjust Strap:

