



Data sheet for:
GHM-13
12vdc 50:1 152rpm
6mm shaft

I. OUTER DIMENSIONS

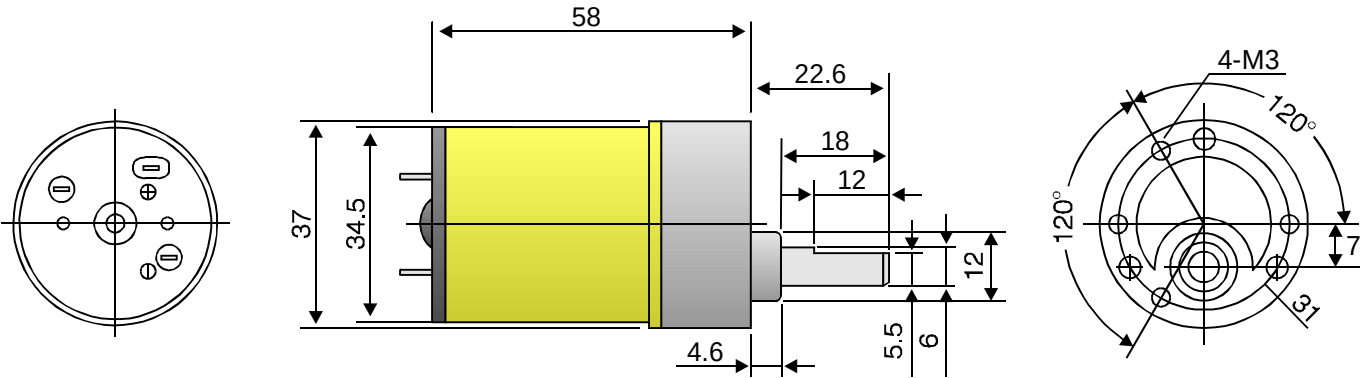

II. DRAWING OF CURVES

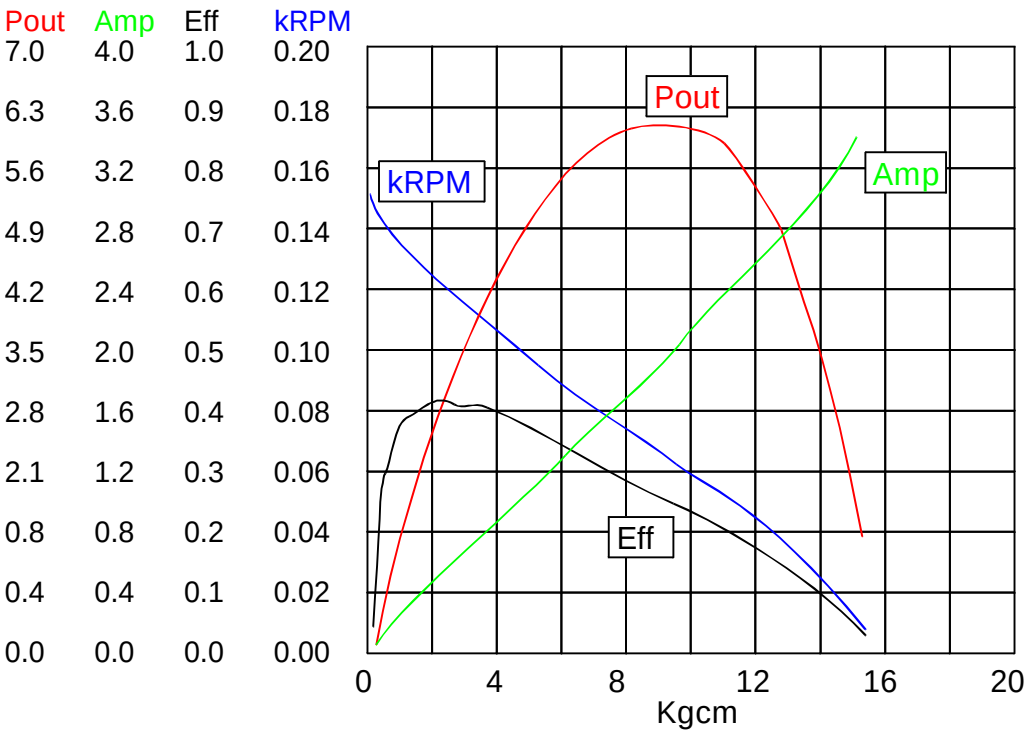

III. SPECIFICATIONS

1. Testing Conditions:
Temp: 25° Celsius
Humidity: 60%
Motor Orientation: Horizontal

2. Rated Voltage: 12vdc

3. Voltage Operating Range: 6-12vdc

4. Rated Load at 12vdc: 1.50Kg-cm
Do not exceed rated load. Damage may occur!

5. No Load Speed at 12vdc: 152 RPM +/- 10%
6. Speed at Rated Load (1.50Kg-cm): 132 RPM +/- 10%

7. No Load Current at 12vdc: < 155mA

8. Current at Rated Load (1.50Kg-cm): < 466mA

9. Shaft End-Play: Maximum 0.8m/m

10. Insulation Resistance: 10M ohm at 300vdc

11. Withstand Voltage: 300vdc for 1 Second

12. The gear motor is not intended for instant reverse.
The gear motor must be stopped before reversing.

13. The gear motor does not include protection from
water or dust etc.