



A CSW Industrials Company

metacaulk®

Firestopping Product Catalog



metacaulk®

FIRESTOP TECHNOLOGIES

We draw the line at



- Advanced Firestop Solutions
- Complete Line
- One Brand




RectorSeal, the global leader in the life safety and passive fire protection industry, has consolidated Bio Fireshield™, FlameSafe® and Metacaulk® brands into one complete firestopping solution line – Metacaulk®.

fire and smoke penetration.




NEW WEBSITE @ METACALK.COM

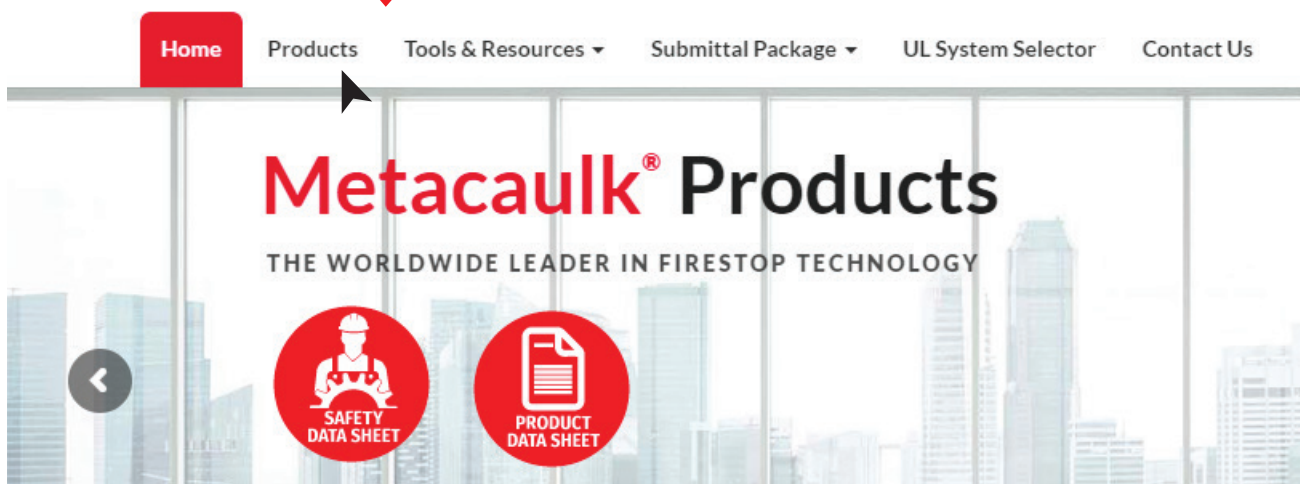

Full line web resource.

- Quick, comprehensive access to product and safety data with clear and concise specifications.
- UL System Selector helps contractors and architects select the correct UL system to best meet the specific field conditions.
- Online training, multilingual product installation information and instructional videos for installers.
- Visit metacaulk.com to experience why we are the worldwide leader in Firestop technology.



Advanced testing.

- Through biotech and technological advancement of materials and devices, Metacaulk strives to exceed international fire containment accreditation standards worldwide.
- Our on-site fire test laboratory monitors all phases of test burns as specified by ASTM E814 (UL 1479) or ASTM E1966 (UL 2079).
- Direct testing speeds the development of new products & UL systems, and delivers quicker response to customer needs.




International reach.

- Our international customer service and product distribution reaches beyond just product sales. Metacaulk offers ongoing hands-on firestop training seminars to promote expert application of our firestopping products and systems worldwide.



Project - Atlantis Hotel & Resort



METACaulk® FIRESTOP SEALANTS

Metacaulk® 1000

Intumescent, water-based firestop sealant

Code	Description	Qty.
66640	10.3 oz. cartridge	12
66303	30 oz. cartridge	12
66312	20.2 oz. foil pack	12
66305	1 gal.	4
66307	2 gal.	1
66309	5 gal.	1

APPLICATION • Will prevent the spread of fire through joint openings and through-penetrations • No dilution or mixing required • Can be used in areas under constant vibration and movement • Use in fire-rated gypsum wallboard partitions, concrete walls or floors, wood floors and concrete or corrugated steel deck floor/ceiling assemblies

RECOMMENDED FOR • Metal pipes • Insulated pipes • Fiberglass & plastic pipes • Wall construction joints • Power & telephone cables



FEATURES

- UL Classified systems up to 4 hrs.
- Highly intumescent
- Excellent freeze-thaw
- For interior use - paintable
- VOC compliant
- 3 year shelf life
- STC rating 62
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- Mold inhibitor tested to ASTM G21
- Complies to UL required Accelerated Aging and High Humidity Testing
- Color: Red



See ordering chart for container sizes available

*FBC™ "System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.



METACaulk® FIRESTOP SEALANTS

Metacaulk® MC 150+

General purpose firestop sealant

Code	Description	Qty.
66648	10.3 oz. cartridge	12
66383	30 oz. cartridge	12
66385	20.2 oz. foil pack	12
66389	5 gal.	1



FEATURES

- Flexible
- Non-sag
- UL Classified up to 4 hrs.
- 3 year shelf life
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- STC rating 65
- Mold inhibitor tested to ASTM G21
- Color: Red

APPLICATION • One component, general purpose fire-rated sealant and smoke seal for construction joints and through-penetrations on both horizontal and vertical surfaces

- Non-sag caulking grade sealant that is easy to apply as well as to retrofit
- Can be used in areas under constant vibration or movement

RECOMMENDED FOR

- Metal pipes
- Insulated pipes
- Fiberglass and plastic pipes
- Wall construction joints
- Power and telephone cables



Metacaulk® 350i

Intumescent firestop sealant

Code	Description	Qty.
66616	10.3 oz. cartridge	12
66611	20.2 oz. foil pack	12
66613	5 gal.	1



FEATURES

- Flexible
- Excellent freeze-thaw
- For interior use - paintable
- STC rating 53
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- 3 year shelf life
- Complies to UL required Accelerated Aging and High Humidity Testing
- Color: Red

APPLICATION • One component, general purpose sealant and smoke seal

- Intumescent, water-based, non-sag caulking grade sealant that is easy to apply and great for retrofits
- Suitable for dynamic movement.


RECOMMENDED FOR

- Metal pipes
- Insulated pipes
- Fiberglass & plastic pipes
- Wall construction joints
- Power & telephone cables



*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.



METACALK® FIRESTOP SEALANTS cont.

Metacaulk® 835+

Elastomeric, silicone firestop sealant

Code	Description	Qty.
66645	10.15 oz. cartridge	12
66019	5 gal.	1
66300	20.2 oz caulk grade	12
66301	20.2 oz self-leveling	12



FEATURES

- Exterior / Interior use
- Weather/chemical resistant
- Excellent moisture resistance
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- STC rating 55
- Meets ASTM C920, Type S, Grade NS, Class 25, Use NT, M, G, A, O (For SL- ASTM C920, Type S, Grade SL, Class 24, Use NT, M G, A, O)
- 2 year shelf life
- Color: Gray

APPLICATION • Used in systems where dynamic movement is expected

- Resistant to chemical exposure

RECOMMENDED FOR

- Cable and cable trays • EMT
- Insulated and uninsulated steel pipe • Construction and control joints • Interior expansion joints



Metacaulk® 950

Non-combustible firestop sealant

Code	Description	Qty.
66643	10.3 oz. cartridge	12



FEATURES

- Gas/Smokeless under fire exposure
- Hardened cure
- Interior application
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- 2 year shelf life
- Color: Beige

APPLICATION • Formulated with inorganic materials

- Will not create smoke or toxic gases • For interior applications only
- Not for use in vibration or wet environments

RECOMMENDED FOR

- Large openings • PVC/CPVC pipe (closed only) • EMT • Steel, Copper, and Aluminum Pipe
- Multiple Pipes, Conduit, and Cable • Telephone, Power, Romex Cable • Static Construction Joints



*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.



METACaulk® FIRESTOP SPRAYS

Metacaulk® 1200

Code	Description - (Red)	Qty.
66379	5 gal. spray	1
66292	20.2 oz. caulk grade	12
66015	30 oz. caulk grade	12
66387	5 gal. caulk grade	1
66529	5 gal. spray (USA)	1
Code	Description - (White)	Qty.
66527	5 gal. spray	1
66294	20.2 caulk grade	12
66525	30 oz. caulk grade	12
66526	5 gal. spray (USA)	1
66386	5 gal caulk grade	1



FEATURES

- Extremely flexible
- Excellent dynamic movement
- Excellent freeze-thaw
- STC rating 65
- UL Classified up to 4 hrs
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- Mold inhibitor tested to ASTM G21
- 3 year shelf life
- Color: Red or White

Spray & caulk firestop Mastic

APPLICATION • Cures to an elastomeric membrane seal that is suitable for dynamic movement • Mastic spray provides a fast, economical means of installation on long joint runs

RECOMMENDED FOR • Construction joints such as: top of the wall, curtain wall perimeter, expansion, and control • Cable trays • HVAC Ductwork • Deflection Track Wall Systems



C70 Industrial Coating

Code	Description	Qty
50250	5 gal. gray	1
50253	5 gal. white	1




FEATURES

- No cable derating
- Interior use
- Easy to apply
- Cures to a flexible seal
- 2 year shelf life
- Color: Gray or White

Acrylic latex for power cables

APPLICATION • Acrylic latex heavy duty spray coating designed to prevent vertical and horizontal spread of fire along grouped or single communication or power cables. • Compatible with and adheres to typical cable jacketing materials • Suitable for areas of limited movement



"FBC™ System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

CID

CAST-IN-PLACE DEVICE

Intumescent service supply.



Metacaulk CID provides through floor firestop protection for all types of building service penetrations.




Cast-In-Place Device

Firestop for through floor penetration.

Code	Cast-in-Place Device	Qty.
67202	2-inch device (8-in. height)	12
67203	3-inch device (8-in. height)	12
67204	4-inch device (8-in. height)	12
67206	6-inch device (8-in. height)	6
Code	Height Extension	Qty.
67232	4-in. extension for 2-in. device	6
67233	4-in. extension for 3-in. device	6
67234	4-in. extension for 4-in. device	6
67236	4-in. extension for 6-in. device	6
Code	Deck Adapter Kit	Qty.
67222	2-inch device adapter	6
67233	3-inch device adapter	6
67234	4-inch device adapter	6
67236	6-inch device adapter	6

APPLICATION • Single component Cast-In-Place device, approved for use with a multitude of penetrating items. Will prevent the spread of fire from through-penetration services in concrete floors • Installs prior to concrete pour. • Casts directly into the concrete to form an embedded intumescent service supply.

RECOMMENDED FOR • Combustible plastic/metal pipe, power & telephone cable floor penetrations in multi-floor construction. • Installs using either temporary wood or metal forms.

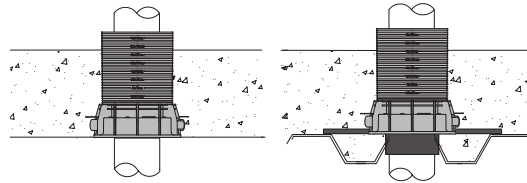

CID Alignment connectors allow tight placement of multiple penetrations.




FEATURES

- Integral intumescent firestop
- UL Classified systems up to 3 hrs
- Eliminates drilling of concrete
- Reduces labor time
- Tested in accordance with ASTM E814 (UL 1479)
- Made in USA



*FBC™ "System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.



FIRESTOP DEVICES

Metacaulk® Firestop Collars

Prefabricated system



Code	Description	Qty.
66352	1-1/2" Pipe Collar	12
66353	2" Pipe Collar	12
66350	3" Pipe Collar	6
66351	4" Pipe Collar	6
66354	6" Pipe Collar	2




FEATURES

- No measurements of material
- Fits in limited access areas
- 25% reduction of installation times
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

APPLICATION • UL classified for both open and closed systems • Simple locking mechanism for easy installation

RECOMMENDED FOR • PVC • CPVC • ABS • PVC foam core • ABS foam core • FRPP • PEX pipe • Electrical cable

Contact Tech Services for other options.

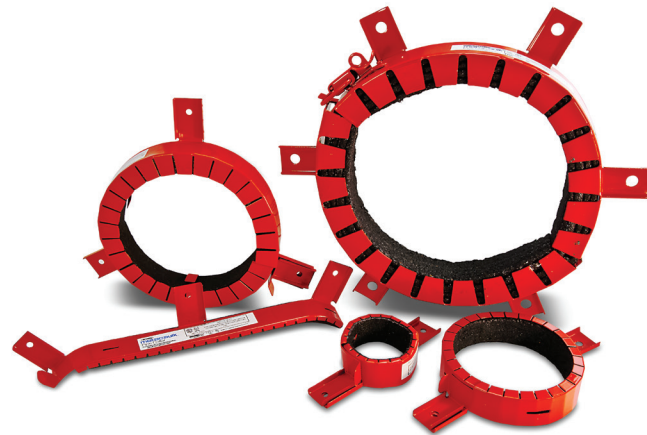

U.S. Patent No. 6,207,085

Metacaulk® Intumescent Sleeve

Firestop device

Code	Description	Qty.
66584	For 2", 3" & 4" Pipe	6
66582	For 6" & 8" Pipe	1




FEATURES

- No steel bolts or fasteners
- Can be retrofitted
- Flexible
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

APPLICATION • Firestop through penetrations with a single sleeve • Ideal for combustible pipes penetrating a concrete fluted deck assembly • Eliminates the need to firestop on both sides of a penetration

RECOMMENDED FOR • PVC • cc-PVC • CPVC • FRPP • PP • ABS • PVDF • PEX • Rigid non-metallic conduit installations

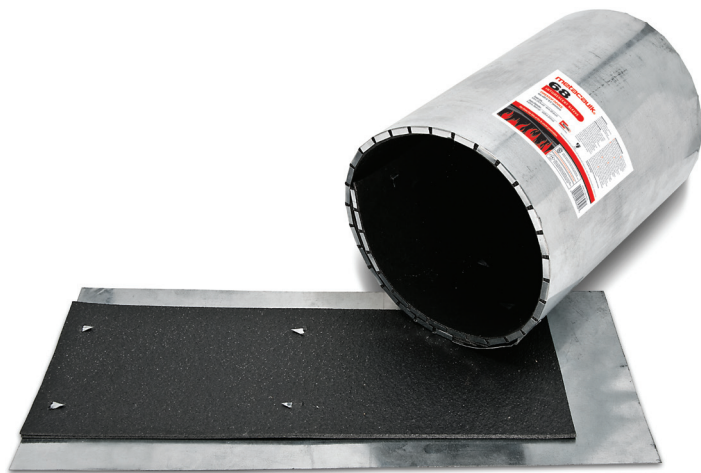

US Patent No 6,207,085

*FBC™ "System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.



JOINT/WRAP STRIP

Blaze Foam™

Code	Description	Qty.
66024	48" x 5/8" x 1.5"	40 pcs.



FEATURES


- Easy one step installation
- For 1 & 2 hr rated gypsum walls
- No mechanical fastening required
- Tested in accordance with ASTM E1966 (UL 2079)
- Highly intumescent
- STC rating 64
- L Rating < 1 CFM/LF

Intumescent compressible firestop foam

APPLICATION • Intumescent compressible foam used to firestop head of wall, wall to wall and bottom of wall joint applications both dynamic and static • Designed for installation within fire resistive joints with up to 2 hours F rating

RECOMMENDED FOR

- Head of Gypsum Wall, Wall to Wall and Bottom of Wall joint applications both dynamic and static



US Patent No. 6,207,085

Joint Strip

Code	Description	Qty.
66700	1/16" x 1" x 82' strip	6
66701	1/16" x 1-1/2" x 82' strip	4
66704	1/16" x 2" x 82' strip	3
66702	1/16" x 2-1/2" x 82' strip	2
66703	1/16" x 3" x 82' strip	2
66705	1/16" x 4" x 82' strip	2



FEATURES

- No firestop caulk required
- Single sided application
- Simple & easy to use
- Tested in accordance with ASTM E814 (UL 1479) & ASTM E1966 (UL 2079)
- Complies to UL required Accelerated Aging and High Humidity Testing



Flexible material for up to 2" wide joints

APPLICATION • Flexible strip firestop material used in concrete and masonry floor and wall joints up to 2" wide, duct insulation and up to 4" PVC/CPVC & Membrane penetrations • Prevents the passage of fire between joints

RECOMMENDED FOR

- Stadium construction, tilt up panels
- Curtain wall panels
- All concrete and masonry wall and floor construction joint applications



US Patent No. 6,207,085

Wrap Strip

Code	Description	Qty.
66135	1" x 12'	6
66136	2" x 12'	4



FEATURES

- No cure time
- Easy to apply
- Long length means less waste
- Systems up to 14" PVC
- Highly intumescent
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing



Flexible intumescent strip for plastic and insulated pipe

APPLICATION • Simply wrap required number of strips around penetrating item to completely fill the annular space or as required by system design • When exposed to heat, expands to form a hard char to seal off the penetration

RECOMMENDED FOR

- Plastic and insulated pipe applications



US Patent No. 6,207,085

*FBC™ System Compatible™ indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.

Contact: RectorSeal® P 713-263-8001 | 800-231-3345 F 713-263-7577 | 800-441-0051 W rectorseal.com



ELECTRICAL OUTLET FIRESTOP

Cover Guard™

Fire-rated gasket for electrical boxes



Code	Description	Qty.
66270	Double receptacle	50
66272	Single receptacle	50
66274	Double switch	50
66276	Single switch	50
66265	Single decor	50
66266	Double decor	50




FEATURES

- Good sound insulator
- Easy to install
- Highly intumescent
- STC rating 54
- Complies to UL required Accelerated Aging and High Humidity Testing



APPLICATION • A single component fire-rated gasket for use with electrical boxes to comply with the "24 inch rule"

- Fits under the cover plate and does not take up volume

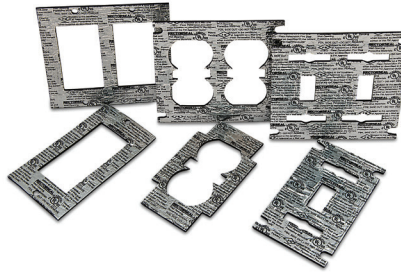

US Patent No. 6,207,085; 6,252,167 & 7,348,484

Box Guard™

Fire-rated pad for electrical boxes



Code	Description	Qty.
66366	Single box	50
66367	Double box	50
66369	4'-11/16" x 4'-11/16"	50



FEATURES

- Adheres to back of electrical box
- Non-conductive
- Highly intumescent
- STC rating 53
- Complies to UL required Accelerated Aging and High Humidity Testing




APPLICATION • One component fire-rated for use in electrical boxes • It is inserted on the inside back wall of an electrical box prior to wiring



US Patent No. 6,207,085 & 6,252,167

FRP

Fire-rated putty pads & stick



Code	Description	Qty.
66345	18 cu./in. - stick	12
66340	6" x 7" x 1/8" thick	20
66335	7" x 7" x 1/8" thick	20



FEATURES

- Applied by hand
- No asbestos fillers
- Pads - STC rating 60
- For interior use
- Adheres to all common building surfaces
- Tested in accordance with ASTM E814 (UL 1479)



APPLICATION • Putty sticks are used to seal around penetrating items through fire-rated walls, floors and within blank openings • Putty pads are used to maintain the hourly rating of fire-rated walls containing electrical metal outlet boxes and to reduce sound transmission • Hand moldable with no curing





FIRESTOP FOR LARGE OPENINGS

Composite Sheet

For large openings with or without penetrating items

Code	Description	Qty.
66320	36" x 36"	1



FEATURES

- Light weight
- Thinner sheets
- Re-enterable
- No VOC
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

APPLICATION • Rigid fire resistive panel used to seal penetrations and restore the fire rating to floor/ceilings or walls • Made of reinforced, highly intumescent material bonded on one side to a stainless steel sheet • Ideal for clean room applications



US Patent No. 6,207,085

FRM

Fire rated mortar - For large openings

Code	Description	Qty.
66331	20 lbs. pail	1
66334	45 lbs. bag	1



FEATURES

- Non-sag adjustable consistency
- High yield per lb.
- No special tools needed
- Tested in accordance with ASTM E814 (UL 1479)
- 2 year shelf life
- Color: Red

APPLICATION • Rapid hardening gypsum/cement compound for large openings • Sets without shrinking and can form a rigid, gas tight, fire resistant seal • Can be cut or drilled and resealed

RECOMMENDED FOR

- Power cables • Fiber optic
- Telephone cables • Aluminium or steel cable trays • EMT
- Copper • Steel • Cast iron pipe



Firestop Pillows

For large temporary openings

Code	Description (Pillows)	Qty.
66362	2" x 9" x 6"	10
66363	3" x 9" x 6"	10



FEATURES

- Forms a very strong char
- No wire mesh required
- Easy to install - no tools
- Tested in accordance with ASTM E814 (UL 1479)
- Complies to UL required Accelerated Aging and High Humidity Testing

APPLICATION • Intumescent • Designed for use primarily in large temporary or frequently accessed openings with cables, cable trays, blank openings or multiple penetrations





SMOKE SEALANTS

SAS Sealant

Code	Description	Qty.
66652	20.2 oz. foil pack	12
66650	5 gal.	1

Tested to
ASTM E84



FEATURES

- Meets LEED requirements
- Excellent for large openings
- Impedes sound transfer
- Water clean up
- Easy to dispense
- Use both vertically or horizontally
- Interior application
- STC rating 69
- 3 year shelf life
- Color: White

Smoke & Acoustic, High-grade acrylic latex

APPLICATION • Provides a permanent seal for penetrations, membrane openings and static or dynamic joints in smoke or sound rated assemblies

- In the event of a fire it will prevent the movement of smoke and impede the transfer of sound in non-fire rated assemblies

RECOMMENDED FOR

- Metallic and nonmetallic pipes
- Outlet and receptacle boxes
- Membrane penetrations
- Head of wall
- Bottom of wall
- Wall to wall joints



Metacaulk® RS 136

Code	Description	Qty.
66408	10.3 oz. cartridge	12



FEATURES

- Smoke & acoustic caulk
- Non-combustible
- Interior application
- Tested in accordance with ASTM E136
- Color: Red

Fireblock / Smoke seal caulk

APPLICATION • General purpose fireblock, draft stop

- Beds and seals small voids, splices and gaps
- Water soluble
- Not for use in vibration or wet environments

RECOMMENDED FOR

- Large openings
- PVC/CPVC pipe (closed only)
- EMT
- Steel, Copper, and Aluminum Pipe



Draft-Block™

Code	Description	Qty.
96500	12 oz. aerosol	12

FEATURES

- Expands 3X
- Tack-free in approx. 45 min.
- No urea or formaldehyde

Expanding polyurethane foam

APPLICATION • Excellent filler which bonds and insulates

- Fill voids, cracks, crevices and small cavities on flat or irregular surfaces
- Reduces sound transmission
- Totally dielectric



*FBC™ "System Compatible" indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® pipe and fittings.

**FBC™, FlowGuard Gold®, BlazeMaster® and Corzan® are licensed trademarks of The Lubrizol Corporation.



FIRESTOP ACCESSORIES

Caulking Guns

Cartridge & sausage


Code	Description	Qty.	FEATURES
66114	10.3 oz. gun	1	• Industrial grade
66115	30 oz. gun	1	
66116	20.2 oz. foil pack gun	1	
66117	Replacement tips	25	



Universal Collar

For concrete, wood & gypsum

Code	Description	Qty.	FEATURES
66091	2" x 50' roll	1	• Galvanized steel
66095	1" x 50' roll	1	

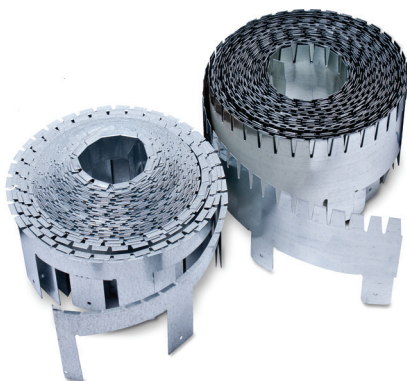

6lb./ cu. ft. Safing

Mineral wool backing

Code	Description	Qty.	FEATURES
66101	2" thick	8	• Non-combustible



Delta Deck Plugs

36" long

Code	Description	Qty.	FEATURES
66401	1-1/2" x 3-1/2" x 4-1/2"	48	• Non-combustible
66403	1-1/2" x 4-1/2" x 5-1/2"	39	• Mineral wool backing for fluted deck
66409	3" x 5" x 7"	18	



Foam Backer Rod

Fills gaps prior to sealing

Code	Description	Qty.	FEATURES
66112	1" x 75'	1	• Easy-to-use





RELATED PRODUCTS

Cable End Cap

Quick seal against moisture & corrosion

Code	Description	Qty.
50231	QC2 .75" x 1.25" red	50
50232	QC3 1" x 1.5" orange	50
50233	QC4 1.25" x 1.75" gray	25
50234	QC5 1.5" x 2" black	25

- FEATURES**
- No heat required
 - Instant seal
 - Simple to install
 - Reinforced ends
 - Pliable butyl mastic sealant
 - Works in extreme temps



Fiberglass Tying Cord

For power cables

Code	Description	Qty.
50219	QTC250 350'	1

- FEATURES**
- For use with Arc Sleeve
 - For tying wiring harnesses & cable looms



Arc Sleeve

For large power and utility cables

Code	Description	Qty.
50241	500/700 3'	1

- FEATURES**
- Fire and fault arc protection
 - Easy snap-on application
 - Custom dip-molded
 - Fits tightly around cables
 - For large electrical cables





OTHER PRODUCTS

K.O. Dirt Blaster™

Dirt and grease stripper

Code	Description	Qty.
88438	20 oz. aerosol	12

FEATURES

- Dissolves grease quickly, Quick dry
- Pressure washes small condenser coils without a water rinse

APPLICATION • Non-conductive, non-flammable; will not short out electrical equipment • Effective on restaurant grease and other greasy surfaces • No CFC's



Lets-Go™

Penetrant, lubricant and freeze-up preventer

Code	Description	Qty.
73012	12 oz. aerosol	12

FEATURES

- Loosens frozen bolts, nuts & joints
- Protects from water & weather.

APPLICATION • Covers metal surfaces with a clinging, tough, long-lasting film of lubricant • The wetting power acts quickly on rusted and seized parts • Displaces moisture from wiring and equipment.



Golden Pipe Shredder™

Restore welded plastic fittings

Code	Description	Qty.
98040	1-1/2"	4
98041	2"	4
98042	3"	4
98043	4"	4
98050	Set of 4 tools	1

Sold separately in 4 sizes or as a set of 4 with durable carry case

FEATURES

- Carbide cutting blades
- Unique guiding system
- Made of heat tempered steel
- One piece body

APPLICATION • Reams out solvent welded plastic fittings so they can be reused • Cuts stub outs to be flush or recessed with wall • Removes cracked water closet flanges



RectorSeal® EP-200

Epoxy putty

Code	Description	Qty.
97600	2 oz.	24
97601	2 oz. refill	24
97602	Blistercard	12
97606	EP-400 4 oz.	12



FEATURES

- Mixes like putty
- Hardens in minutes
- Can be drilled, taped, filed, machined, sanded and painted
- Bonds and fills a variety of materials



Dark Cutting Oil

Low rpm machine thread cutting oil

Code	Description	Qty.
94392	qt.	12
94272	gal.	6
94192	5 gal.	1
94111	55 gal.	1

FEATURES

- Increased lubricity/longer die life
- Penetrates quickly
- Keeps dies cool

APPLICATION • Designed to reduce friction • Effective coolant and anti-weld agent • An extreme pressure lubricant during thread cutting operations • Will not congeal above 20°F



GoldenGrip™

Internal pipe wrench

Code	Description	Qty.
97250	Single 1/2"	6
97251	Single 3/4"	6
97252	Double 1" - 1-1/4"	3
97253	Double 1-1/2" - 2"	3
97250	Set of 4 tools	1

Sold separately in 4 sizes or as a set of 4 with durable carry case


U.S. Patent No. 6,675,679B2

FEATURES

- Self-locking & reversible
- No thread damage
- Works in tight spaces

APPLICATION • The right tool for quick and easy installation or extraction of pipe nipples • Self-locking, reversible internal wrench can be used with ratchets, extensions and impact wrenches





BIG FOOT SYSTEMS® FRAME SUPPORTS

Multi Foot

Frame support ideal for smaller systems

Code	Description	Qty.
87711 (RSP16)	16" Multi Foot	1
87712 (RSP24)	24" Multi Foot	2

FEATURES

- Strong and Lightweight
- Weather resistant PVC - Rubber/PVC
- Linear track holds 1/2" hex head bolts
- Two 7/8" long bolts included

Max load capacity:
RSP16 - 572 lbs.
RSP24 - 1045 lbs.

87711

H = 3 3/4"
W = 7"
L = 15 3/4"

87712

H = 3 3/4"
W = 8 3/4"
L = 24"



H-Frame

Accepts standard 1-5/8" strut, optimum support

Code	Description	Qty.
87713 (RSPD12)	H-Frame Kit w/ 12" Square	1
87714 (RSPD18)	H-Frame Kit w/ 18" Square	1
87715 (RSPD24)	H-Frame Kit w/ 24" Square	1

each kit contains 2 feet

FEATURES

- Ideal rooftop support of equipment & systems
- Weather resistant
- Recycled crumb rubber pad
- Accepts one 5/8" strut (not included)
- Build custom frames and supports

Max load capacity:
RSPD12 - 661 lbs.
RSPD18 - 1100 lbs.
RSPD24 - 1100 lbs

87713

H = 3 1/2"
W = 13"
L = 13"


87714

H = 4 1/4"
W = 19"
L = 19"

87715

H = 4 3/4"
W = 25 1/4"
L = 25 1/4"





POLYMER & RUBBER RISERS

Polymer Risers


Simple lightweight raised mounting support

Code	Description	Qty.
87761 (PR-351N-I)	14" Polymer Riser	20
87762 (PR-351N-M)	18" Polymer Riser	20
87763 (PR-351N-L)	39" Polymer Riser	4
87765 (PRC-351N)	End Caps	1 Pair

FEATURES

- Ideal for piping, duct runs, cable trays and condensers
- Weather resistant PVC
- Linear track holds 3/8" hex head bolts
- Two 7/8" long bolts included

Max load capacity: PR-351N-I - 308 lbs.
PR-351N-M - 397 lbs. PR-351N-L - 880 lbs

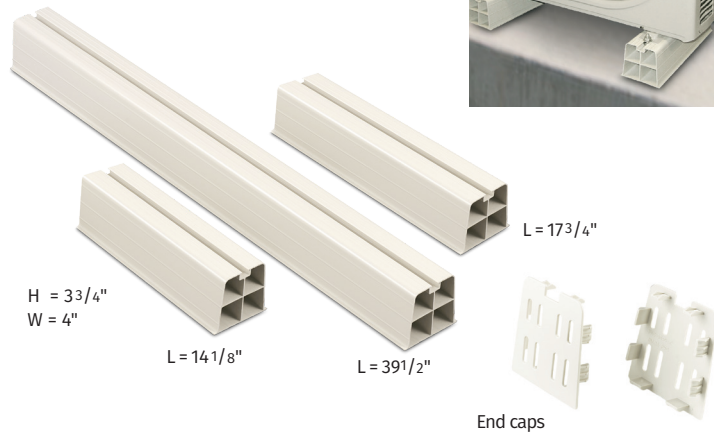

Fix-It-Foot


Additional vibration isolation and stability

Code	Description	Qty.
87771 (RMB10)	Fix-It-Foot 10"	1
87773 (RMB16)	Fix-It-Foot 16"	1
87775 (RMB24)	Fix-It-Foot 24"	1
87776 (RMB40)	Fix-It-Foot 40"	1

FEATURES

- Ideal for rooftop support of equipment & systems
- Weather resistant
- Recycled crumb rubber pad
- Recessed underside permits solid stance
- Aluminum track permits the use of standard strut hardware (not included)

Max load capacity: RMB10-181 lbs. RMB16-282 lbs.
RMB24-494 lbs. RMB40-650 lbs.

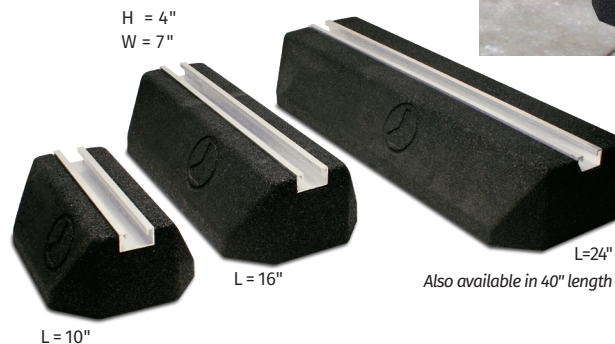

Fix-It-Foot Low


Low profile rubber riser

Code	Description	Qty.
87772 (RMB10L)	Fix-It-Foot Low 10"	1
87774 (RMB16L)	Fix-It-Foot Low 16"	1

FEATURES

- Ideal for rooftop support of equipment & systems
- Weather resistant
- Recycled crumb rubber pad
- Recessed underside permits stability
- Aluminum track permits the use of standard strut hardware (not included)

Max load capacity: RMB10L - 181 lbs RMB16L - 282 lbs

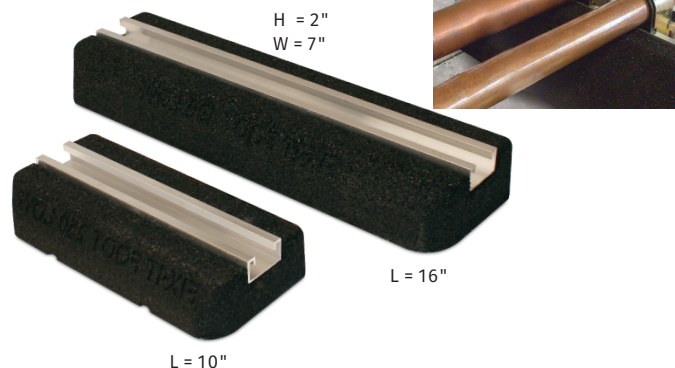

Through the use of current technology and social media, RectorSeal provides support for all chemical and mechanical products and tools including:

- Technical information
- Marketing materials
- Product installation training videos
- Product codes
- SDS and product data sheets.
- Trade show scheduling


Firestopping



A CSW Industrials Company

INNOVATIVE PRODUCTS FOR THE TRADES

rectorseal.com



Electrical



Plumbing



HVAC-R

Represented By:

All information is believed to be current at the time of printing, but our policy is one of continuous development. RectorSeal makes no warranties, express or implied, as to its accuracy. RectorSeal reserves the right to discontinue, update or change the information at any time without notice or without incurring obligations.

RectorSeal®, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice.
©2018 RectorSeal. All rights reserved.

R50263 6/18