

SECURE PLUS + RFID

DEADBOLT EDITION



99 RFID Access
Hack-proof Keypad
3D Fingerprint



Secure and manage what's most important to you. Patented PIN Genie® keypad, RFID card and 3D biometric fingerprint provides convenient and secure access with an easy to install deadbolt smart lock.



Multifamily



Residential



BnB/Rental

- Front doors
- Home office
- Back doors
- Garage doors
- And more



Hack-proof digital Keypad
Generate and stores up to 33 access codes with specific profiles and permissions



Your Finger is Your Key
3D Biometric Fingerprint sensor stores up to 99 fingerprints.



Mobile App Control
Unlock, lock, or check door on your smartphone

Features and benefits



100M+ accesses granted
Most trusted fingerprint sensor smart lock



Hack-proof Keypad
Patented PIN Genie® shuffling the keypad numbers



Smartphone control
Open/close, share, or revoke access with others



MIFARE RFID card
Fast, easy and secure access



Programmable auto-locking
Never worry about forgetting to lock your door



Long-lasting battery
Up to 10 months battery life with typical uses



Weatherproof
IP54 works in -4°F to 151°F (-20°C to 66°C)



Re-key capable
Replace the key not the lock with standard re-key kit

Property management



See the big picture from here

Works with LocklyOS™ Total Access* a full property management system of software, products, and services designed to allow you to view and control where, when, and by whom your property's being accessed from anywhere in the world.




Installation



Easy, one-person, DIY installation

Convert your existing deadbolt to a fingerprint access smart lock with common household tools in less time than a cup of coffee.




Typically 15/min. with common household tools

Door thickness
1 3/8" (35mm) to
2" (50mm)

Cross bore
1" (25mm)



Fits right & left
swing doors

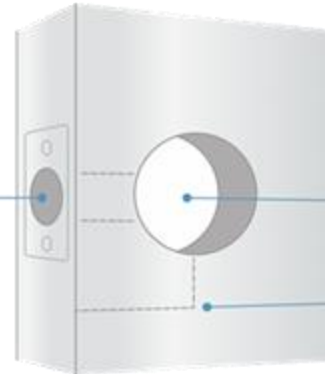

Bore hole
2-1/8" (54mm)

Backset (standard)
2-3/8" (60mm) or
2-3/4" (70mm)



Download installation
guide



Download door
drilling template



Watch installation
video



Download user manual

Access and control options



Your finger is
your key

Keyless Access

Secure, fast, and convenient on-site set-up, allows management of properties from anywhere



Mobile app
Control

Mobile App Control

Unlock, lock, check door, track access history and unique user profile data.



Programmable
auto locking

Offline Access Codes™

Grant access codes to trusted users. Codes work offline without Wi-Fi or Internet.

Grant Access, when you're not there

Remotely lock and unlock your door from anywhere.

Real-time Monitoring and Status

Monitor open/closed door status with real-time alerts sent to your smartphone.



Real-time
smartphone alerts

Secure Scan-to-Open

Unlock by unique QR code, revoke capability anytime

Auto Locking

Never worry about forgetting to lock the door with programmable auto-locking.

Wi-Fi Control*

Monitoring and control from anywhere and voice assistant control with Alexa or Hey Google

Fast Pass RFID Access

Supports up to 99 MIFARE RFID card/tag/sticker/fob key (3 RFIDs included)



RFID
Access

Replace the key not the lock


Re-key with readily available standard 6-pin cylinder SC4 re-key kits.

Lockly Air Transfer Programming

Seamless transfer user profiles (except fingerprints) between Lockly devices with our Air Transfer feature in just a few clicks



Secure Scan-to-
Open



Electronic Specifications

Access Codes⁶	Stores up to 33 PIN access codes
Fingerprint Access	Stores up to 99 biometric fingerprints
Remotely Shareable Temporary Access	Unlimited Offline Access Codes ⁶ / eBadges
RFID/Fob Key Access	Stores up to 99 MIFARE RFID/fob
Access Logs	Unlimited ⁶ Accessible via Lockly app or LocklyOS™
Visual and Audible	Exterior: LED (Red, Green.) Interior: LED (Red) Configurable Lock/Unlock Audio Indicator
Communication Standards	BLE 4.2 , Wi-Fi 2.4GHz , RF433.92MHz Advanced Encryption Standard (AES), 256-bit
Gateway Communication Range (networked solution)	Up to 98' (30m) BLE Up to 197' (60m) Wi-Fi Up to 164' (50m) RF433.92MHz Unobstructed open environment
Command Response	Responds to command from host in less than 3 seconds when linked to Lockly Wi-Fi Hub 0.2S on Fingerprint Recognition
Connectivity Options	Lockly app, LocklyOS, Matter Controller ALL in real-time communication
Available Signal Status	Battery Status via App Open/Close Door Status Bluetooth Connectivity Indicator Sensor LED (Red/Green)
Battery Life	AA Alkaline Batteries x 4 Up to 1 year (offline mode) up to 10 months (regular use with App & Sensor 9V Backup Power socket
Operating Temperature	-4°F to 151°F (-20°C to 66°C)
Operating Humidity	0 - 95% non-condensing

Credential Specifications

Credential Technologies	BLE (2.4 GHz) Wi-Fi (2.4GHz) Capacitive Sensor Patented PIN Genie Keypad
Maximum Read Range	BLE: up to 98' (30m) Wi-Fi: up to 197' (60m)
Mobile Compatibility	Lockly app BLE 4.2 LocklyOS, Matter

Mechanical Specifications

Handing	Field reversible
Materials	Premium Zinc Alloy chassis and escutcheon 20-min fire rate ³
Door Thickness	1-3/8" - 2" (35mm- 50mm)
Backset	Adjustable 2-3/8" or 2-3/4" (60mm or 70mm) 1" x 2 1/4" round corner faceplate
Strike	Deadbolt: 1 1/8" x 2 3/4", round corner Dust box included
Bore	2-1/8" (54mm) diameter Bore hole 1" (25mm) diameter latch hole
Physical Keys	SC4 Re-keying compatible, 2pcs included

Certifications /Warranty

Certification	ANSI Grade 2 ²
Warranty	FBC Lifetime 24/7 Technical Support 5 -year Limited Mechanical & Finish 2 -year Limited Electronics

Ordering information

1 Edition PGD728FC Lockly Secure Plus + RFID	4 Finish SS Satin Nickel MB Matte Black AB Venetian Bronze MG Brushed Gold	7 MatterLink PGH260 (optional/sold separately) Only selected versions are supported ^d
2 Wi-Fi Hub PGH200 (not included/optional) *Wi-Fi hub required	5 Deadbolt Standard Adjustable (60-70mm, included) PGA008 Built-in Door Sensor (optional) ¹	8 RFID / Fob key PGA803WH Tag key (3 included) PGA803P Fob key (10pcs) PGA803L 1" RFID sticker (10pcs) PGA803LL 2 1/2" x 1 1/2" RFID sticker (10pcs) PGA803S RFID card (10pcs)
3 Touchscreen Cover PGA730 (optional /sold separately)	6 Extension Screw Kit (optional/ sold separately) 2 1/16"- 2 11/16" (53-68mm) door thickness PGA1101	

^{6a} Requires LocklyOS subscription

¹ Product Serial number must contain N, such as PGD728NXXXXXXX

² Manufacturer declares compliance to ANSI A156.36 Auxillary locks, ANSI A156.5 Cylinders and Input Devices for Locks

³ Made compliant with UL10B , UL10C fire tests

