LOCKLY®
Enjoy the freedom™

Lockly Styla


Smart Handlebar Designer Edition

PGD899Bxx



Lockly Styla, a Red Dot Award winner, masterfully combines elegance with cutting-edge technology. This sophisticated lock discreetly conceals its advanced smart features, revealing them only upon your approach, while maintaining the refined appearance of a designer handlebar at all other times. Meticulously designed with a focus on craftsmanship, Lockly Styla has been thoughtfully constructed, from material selection to intricate details, seamlessly integrating a range of advanced functions to foster a modern home lifestyle that is both exceptional and understated.

- MATTE BLACK PGD899BMB
- SATIN NICKEL PGD899BSG

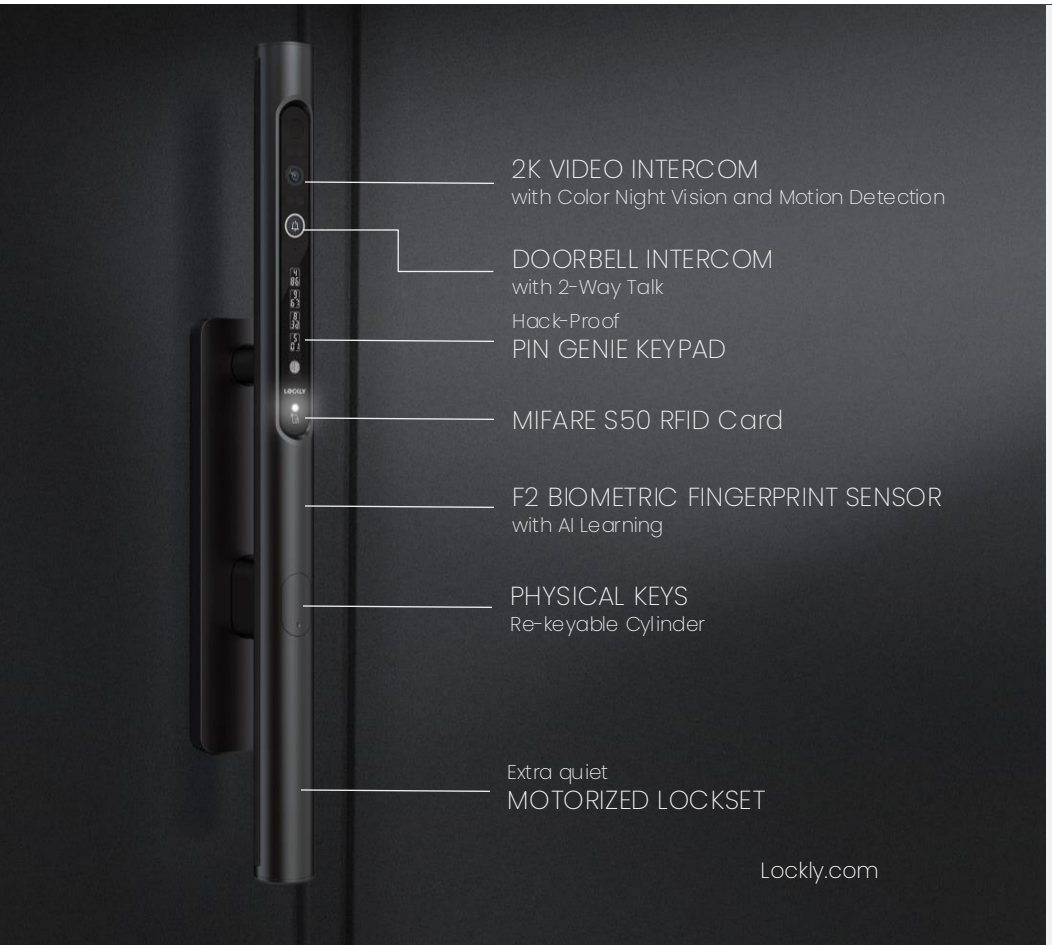

New-Gen
Vision Connect Hub Included

Wi-Fi Connected
Built-in Chime
Real-time notifications
Unlock from anywhere



PGH123W

Watch the film ›

FEATURE HIGHLIGHTS



GRAB TO OPEN YOUR DOOR

Unlock your door from the inside as you naturally grab the handlebar.



COLOR NIGHT VISION

Detects as you approach. See it through up to 13ft. distance at night.



AI MOTION SENSOR

Send real-time alerts or setup recording when motion is sensed.

MULTIPLE WAYS TO UNLOCK

works with Google Home

2K HD CAMERA & INTERCOM
Greet guests in real-time from your smartphone from anywhere in the world.

ACCESS CODES
6-8 digits PIN code with patented PIN Genie keypad to protect from password guessing.

RFID ACCESS
Secure and convenient way to unlock, with the ability to revoke if card is lost.

EKEYS AND EBADGES
Set up users to unlock, no matter it is permanent, temporary, or one-time.

VOICE CONTROL
Unlock your door or check status with Google Assistant

MECHANICAL KEYS
Rekey capable.

F2 FINGERPRINT SENSOR
Ergonomic placed sensor for natural unlocking. Super fast 0.2 sec recognition with AI Learning.

APP CONTROL
Unlock with free Lockly Home app from anywhere, anytime.

OFFLINE ACCESS CODE™
Grant one-time or recurring access even if you are not connected to the internet.

WELCOME MODE
Keep your door unlocked during preset schedules for instant access..

CHILDPROOF SWITCH
Prevent children or adults with mental disabilities rom wandering outside or away from home.

EASY MANAGEMENT, ANYWHERE, ANYTIME

REAL-TIME NOTIFICATIONS
Lock, unlock and manage from anywhere, anytime.

AIR TRANSFER
Copy user profiles between compatible Lockly devices.


AUTO LOCK
Programmable from 5s– 120s.



REAL-TIME CONTROL
Unlock and receive real-time notification with built-in Wi-Fi.



LOCKLY HOME APP
Lock, unlock, check activities and manage from anywhere, anytime.



LOCKLY OS
Manage all your properties, locks and users from one smart total access solution.

STYLA DESIGNER EDITION

INSTALLATION AN RESOURCES



DOOR REQUIREMENT

Left / Right Swing Doors

Door thickness: 1-3/8" -2" (35mm - 50mm)

Bore: 2 x 2-1/8" (54mm) diameter bore hole, 2 x 1" (25mm) diameter latch hole, Requires C2C 4' or 5.5 gap between bore holes

Backset Adjustable 60mm or 70mm

EXTERIOR ASSEMBLY
73mmW x 541mmH x 86mmD

INTERIOR ASSEMBLY
79mmW x 532mmH x 100mmD

VISION CONNECT HUB
70mmW x 160mmH x 70mmD

Watch Video

WHAT'S IN THE BOX

- Lockly Styla
- New Gen Vision Connect Hub
- USB & LAN Cables
- TF Card 32G
- Physical Keys x2
- MIFARE® S50 RFID Card x3
- Fixing Screws
- Mounting Plate
- Strike Plate
- Rechargeable Battery x2
- Activation Card
- Quick Start Guide
- Drill Template

Professional Installation Required

PARTS AND ACCESSORIES

ITEM	SKU / PART NO	DESCRIPTION
Cylinder	PGA8992A PGA 8992B PGA 8992C	Sold separately / optional
Lithium Battery	PGA846	Included
RFID/Fob Key	PGA803WH PGA803P PGA803L PGA803LL PGA803S	Sold separately / optional Tag key (~3 included) Fob key (10pcs) RFID sticker (10pcs) 2 ½" x 1 ⅓" RFID sticker (10pcs) RFID card (10pcs)
Credential Manager Encoder	PGA349	Sold separately / optional

TECH SPECS

LOCKLY®
Enjoy the freedom™

ELECTRONIC SPECIFICATIONS

Video Camera	2K Video Camera 2k/15fps, 1080P/15fps or 720P/20fps, Horizontal 70°/Vertical 131°/Diagonal 150°, HDR – Wide Dynamic Range (Supported), (Auto day/night switch) IR Cut Night Vision, PIR Motion Sensor from 3/8/13 ft range
Access Codes	Stores up to 49[OS] PIN access codes
RFID/Fob Key Access	Stores up to 999[OS] MIFARE RFID/FOB key
Fingerprint Access	Stores up to 99 biometric fingerprints
Voice Control	Hey Google
Remotely Shareable Temporary Access	Unlimited[OS] Offline Access Codes[OS]/eBadges[OS]
Access Logs	Unlimited[OS] Lockly Home app, LocklyOS™
Visual and Audible	Exterior: LED (RGB), Interior: LED (Red/Green), Configurable Lock/Unlock Audio Indicator, Intercom (Doorbell, Microphone, Speaker)
Communication Standards	BLE 4.2, Wi-Fi 2.4GHz, RF868MHz, Advanced Encryption Standard (AES), 256-bit
Gateway Communication Range (networked solution)	Up to 98' (30m) BLE, Up to 197' (60m) Wi-Fi, Up to 197' (60m) RF868MHz, Unobstructed open environment
Command Response	Responds to command from host in less than 3 seconds when linked to Lockly Wi-Fi Hub, 0.2S on Fingerprint Recognition
Connectivity Options	Lockly Home app, LocklyOS™, All in real-time communication, Voice control assistants
Available Signal Status	Battery status via app, open/close door status
Battery Life	Rechargeable 10000mAh Lithium Battery[1] (Included), Type-C Backup Power Socket, Up to 6 months (Regular use)
Weatherproofing	IP65
Operating Temperature	-4°F to 151°F (-20°C to 66°C)
Operating Humidity	0 - 95% non-condensing

CREDENTIAL SPECIFICATIONS

Credential Technologies	RFID Card (13.56 MHz), BLE (2.4 GHz), Wi-Fi (2.4GHz), Capacitive Sensor, Patented PIN Genie Keypad
Standards	ISO 14443
Maximum Read Range	RFID: up to 0.79", BLE: up to 98' (30m), Wi-Fi: up to 197' (60m)
RFID/Fob Compatibility	MIFARE® S50
Mobile Compatibility	Lockly App BLE 4.3, LocklyOS™

MECHANICAL SPECIFICATIONS

Materials	Premium alloy chassis and escutcheon
Door Thickness	1-3/8" -2" (35mm - 50mm)
Backset	Adjustable 2-3/8" or 2-3/4" (60mm or 70mm), 1" x 2-1/4" round corner faceplate
Strike	Deadbolt 1-2/8" x 2-3/4", round corner, Ball catch, Dust box included
Bore	2 x 2-1/8" (54mm) diameter bore hole, 2 x 1" (25mm) diameter latch hole, Requires C2C 4' or 5.5 gap between bore holes
Physical Keys	Laser cut keys compatible, 2pcs included

COMPLIANCE & WARRANTY

Compliance	RoHS, FCC, Works with Google Assistant
Warranty	Lifetime 24/7 Technical Support, 5 -year Limited Mechanical & Finish, 2 -year Limited Electronics

[OS] Requires LocklyOS subscription
[1] Lasts up to 6 months with regular use, (estimated 10 times lock/unlock per day, 20 motion detections, 15 seconds video recording for motion detection.
[3] Fingerprints can only be air transferred from Styla and Zeno Series.

DISCLAIMER: Lockly has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, system, components and options availability are all subject to change without notice to improve features, reliability or design or otherwise.

LOCKLY®
Enjoy the freedom™

NEW-GEN Vision Connect Hub

PGH123W

The New-Gen Vision Connect Hub enables your compatible smart lock with real-time notifications, video intercom, remote access, and user management. It connects via Wi-Fi for a stable and uninterrupted experience.

Designed for added convenience, it features a built-in chime to extend your doorbell's range and local video storage to safeguard your security footage while ensuring privacy protection.



COMPATIBLE DEVICES

Lockly Styla	PGD899G, PGD899B
Lockly Vision™ Zeno Series	PGK798HK

SPECIFICATIONS

Product Dimensions	70mm x 70mm x 160mmH
Color	White / Grey
Power Supply	100V-240V-50/60Hz. Output: 5V 1A Power Adapter and Power Cable Included
Visual and Audible	LED indicator , 90/85dB Chime
Storage	32GB TF Card Included
Communication Standards	2.4GHz Wi-Fi 802.11 B/G/N. Hub to Router. Proprietary Encryption
Communication Range	Up to 98' (30m) BLE, Up to 197' (60m) Wi-Fi, Unobstructed open environment
Command Response	Responds to command from host in less than 3 seconds
Connectivity Options	Lockly Home app, Lockly app, LocklyOS. ALL in real-time communication
Available Signal Status	Battery Status via App, Open/Close Door Status, Bluetooth Connectivity Indicator, Sensor LED (Red/Green)
Waterproofing	IP65
Operating Temperature	-4°F to 151°F (-20°C to 66°C)
Material	Plastic and Fabric
Certifications	RoHS, FCC, ETL