

TIRE INFLATOR



Filling valve*
(counterpart)

Portable unit with no hose connection
Calibrated


Art. No. 0715 93 92

P.Qty. 1

- Tank capacity: 6 liters
- Automatic refilling via filling bell, incl. filling valve (counterpart)
- 80 cm filling hose
- Features double-sided hold-on connector
- Two-button operation (filling and bleeding)
- Precision manometer: 160 mm dia. (0 - 10 bar, protected against overpressure up to 16 bar)
- Improved water drainage thanks to angled manometer. Separately replaceable glass pane
- Rubber buffer protects manometer against abrupt rise in pressure
- Unit features EU approval

*Replacement Filling Valve,
Art. No. 0715 93 921 included in
delivery scope.

HAND FILLING GAGE

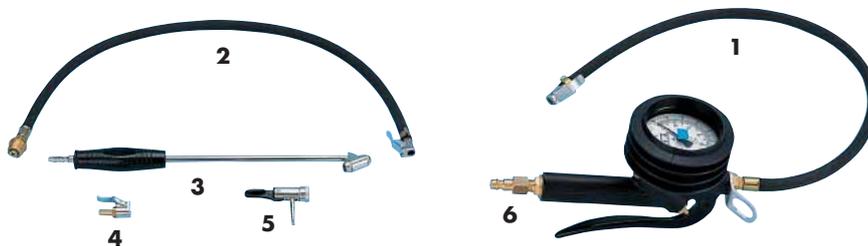

Calibrated

Application:

- 1.) Place plug-in nipple onto tire valve and turn approx. 1/2 turn.
 - 2.) **Bleeding:** Push lever halfway through.
- Filling:** Push lever through until it stops.

Fig.	Designation	Weight in g	Range in bar	Manometer dia. in mm	Art. No.	P. Qty.
1	Hand Filling Gage	1,000	1 - 10	80	0715 54 05	1
2	Quick-Action Plug-In Nipple with hose	200	-	M 18 connection thread	0715 54 08	
3	Hold-On Connector with handle	120	-	-	0715 54 07	
4	Quick-Action Plug-In Nipple	80	-	-	0715 54 061	
5	Valve Lever Head	80	-	-	0715 54 06	
6	Damped Connecting Nipple	50	-	-	0715 54 051	